



SLI LIGHTING

122 East Laurel Street
 Mullins, South Carolina 29574
 Ph: 800-922-6693
 www.havells-sli.com


E2-28-P-UV-N @ 120V	
Ordering Code: 61332	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120-277V
Input Frequency	60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
35W T5	2	35	-4/-20	.69	84	0.9	10	0.99	1.7	1.07
35W T5	1	35	-4/-20	.35	42	1.02	10	0.99	1.7	2.43
28W T5	2	28	-4/-20	.56	68	.93	10	0.99	1.7	1.37
28W T5	1	28	-4/-20	.29	35	1.07	10	0.99	1.7	3.06

WIRING DIAGRAM

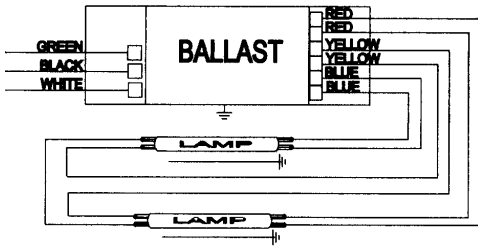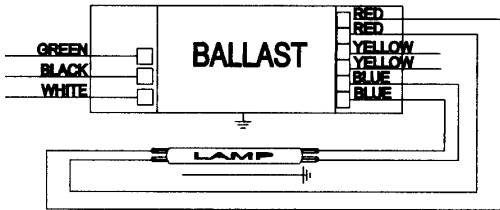

ENCLOSURE

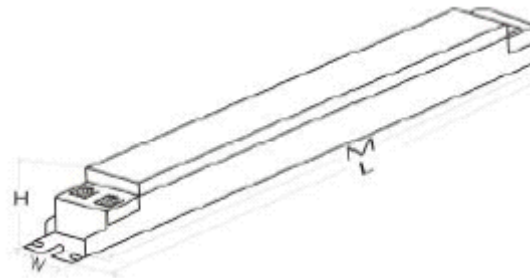

Overall (L)	Width (W)	Height (H)	Mounting (M)
32.5 cm	6.4 cm	3 cm	31.7 cm
12.8"	2.52"	1.18"	12.5"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.