



SLI LIGHTING

122 East Laurel Street
Mullins, South Carolina 29574
Ph: 800-922-6693
www.havells-sli.com


E2-28-P-UV-N @ 277V	
Ordering Code: 61332	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120-277V
Input Frequency	60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
35W T5	2	35	-4/-20	0.3	85	0.95	10	0.99	1.7	1.12
35W T5	1	35	-4/-20	0.16	44	1.03	15	0.98	1.7	2.34
28W T5	2	28	-4/-20	0.25	69	0.96	10	0.99	1.7	1.39
28W T5	1	28	-4/-20	0.13	37	1.08	20	0.97	1.7	2.92

WIRING DIAGRAM

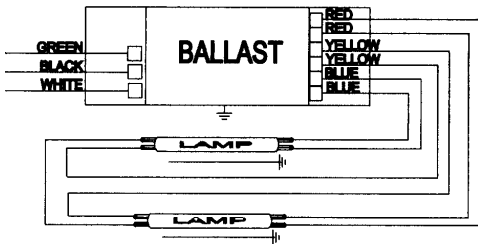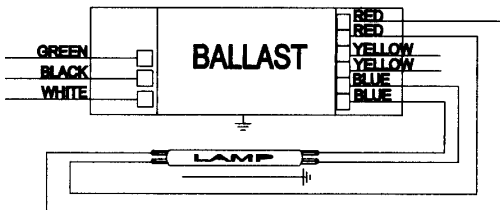

ENCLOSURE

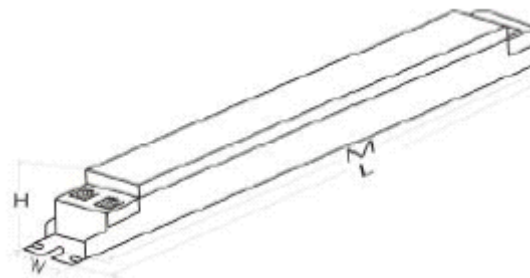

Overall (L)	Width (W)	Height (H)	Mounting (M)
32.5 cm	6.4 cm	3 cm	31.7 cm
12.8"	2.52"	1.18"	12.5"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.