


SLI LIGHTING

122 East Laurel Street
Mullins, South Carolina 29574
Ph: 800-922-6693
www.havells-sli.com

E3/4-28-P-UV-N @ 120V	
Ordering Code: 61333	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
35W T5	4	35	-4/-20	1.38	168	0.90	10	0.99	1.7	1.07
35W T5	3	35	-4/-20	1.01	128	0.93	10	0.99	1.7	1.07
28W T5	4	28	-4/-20	1.12	136	0.93	10	0.99	1.7	0.68
28W T5	3	28	-4/-20	0.88	105	0.96	10	0.99	1.7	0.91

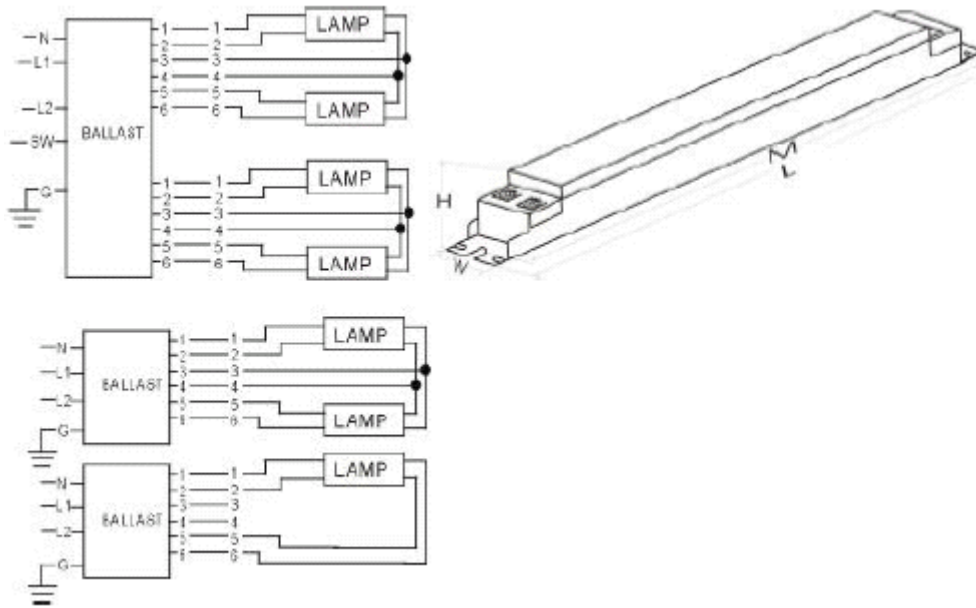

Overall (L)	Width (W)	Height (H)	Mounting (M)
32.5 cm	6.4 cm	3 cm	31.7 cm
12.8"	2.52"	1.18"	12.5"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.