


# SLI LIGHTING

122 East Laurel Street  
Mullins, South Carolina 29574  
Ph: 800-922-6693  
www.havells-sli.com

<b>E3/4-54-P-UV-H @ 120 Volt</b>	
<b>Ordering Code: 61335</b>	
Ballast Type	Electronic
Starting Method	Program Start
Lamp Connection	Series
Input Voltage	120V
Input Frequency	60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
54W T5	4	54	-4/-20	1.94	232	.99	10	0.99	1.7	.43
54W T5	3	54	-4/-20	1.48	178	1.05	10	0.98	1.7	.59
PLL55W	4	55	-4/-20	1.78	214	.88	10	0.99	1.7	.41
PLL55W	3	55	-4/-20	1.3	156	.95	15	0.98	1.7	.61
39W T5	4	39	-4/-20	1.52	184	.98	10	0.99	1.7	.53
39W T5	3	39	-4/-20	1.17	140	1	10	0.99	1.7	.71
PLL50W	4	50	-4/-20	1.86	224	1.04	10	0.99	1.7	.46
PLL50W	3	50	-4/-20	1.43	171	1.05	10	0.99	1.7	.61

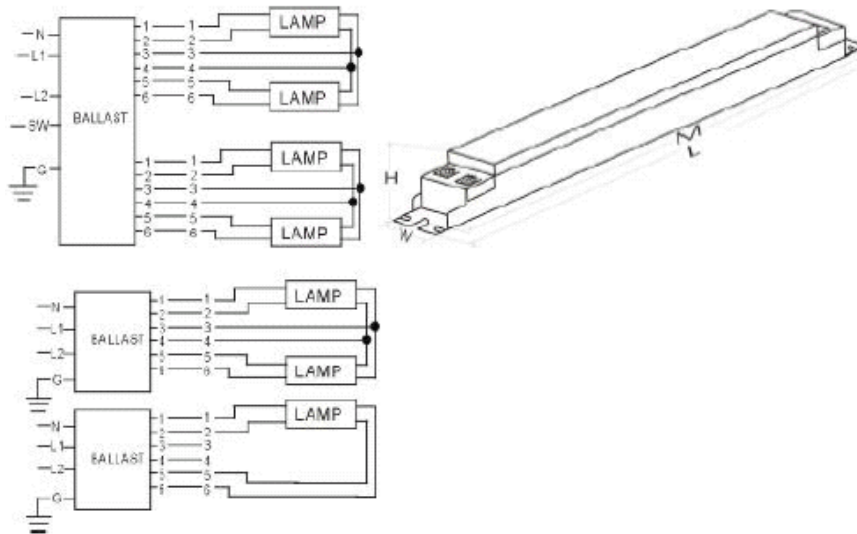

Overall (L)	Width (W)	Height (H)	Mounting (M)
32.5 cm	6.4 cm	3 cm	31.7 cm
12.8"	2.52"	1.18"	12.5"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.