


SLI LIGHTING

122 East Laurel Street
Mullins, South Carolina 29574
Ph: 800-922-6693
www.havells-sli.com


| E2-32-I-UV-N @ 277V | |
|----------------------|----------------------|
| Ordering Code: 61321 | |
| Ballast Type | Electronic |
| Starting Method | Active Instant Start |
| Lamp Connection | Parallel |
| Input Voltage | 120-277V |
| Input Frequency | 50/60 Hz |
| Status | Active |
| Safety Approval | UL/CUL |

| Lamp Type | No. of Lamps | Rated Lamp Watts | Min Start Temp (°F/C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | Max Lamp Current Crest Factor | BEF |
|-----------|--------------|------------------|-----------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|------|
| F32T8 | 2 | 32 | 0/-18 | 0.25 | 67 | 0.99 | 10 | 0.99 | 1.7 | 1.48 |
| F25T8 | 2 | 25 | 0/-18 | 0.2 | 53 | 1.01 | 10 | 0.99 | 1.7 | 1.91 |
| F17T8 | 2 | 17 | 0/-18 | 0.15 | 39 | 1.05 | 35 | 0.95 | 1.7 | 2.69 |
| F40T8 | 2 | 40 | 32/0 | 0.29 | 80 | 0.92 | 10 | 0.99 | 1.7 | 1.15 |
| PLL40 | 2 | 40 | 0/-18 | 0.27 | 73 | 0.92 | 10 | 0.99 | 1.7 | 1.26 |
| F36T8 | 2 | 36 | 0/-18 | 0.21 | 54 | 0.84 | 10 | 0.99 | 1.7 | 1.56 |
| F30T8 | 2 | 30 | 32/0 | 0.24 | 66 | 0.99 | 10 | 0.99 | 1.7 | 1.50 |
| F28T8 | 2 | 28 | 32/0 | 0.2 | 56 | 0.99 | 10 | 0.99 | 1.7 | 1.77 |

WIRING DIAGRAM

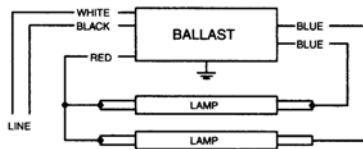

ENCLOSURE

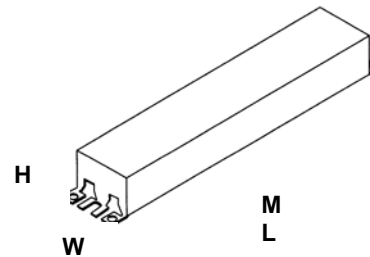

Standard Lead Length (inch/cm)

| | in. | cm. | | in. | cm. |
|--------|------|------|--------------|-----|-----|
| Black | 18.8 | 48 | Yellow/Blue | | |
| White | 18.8 | 48 | Blue/White | | |
| Blue | 30.9 | 78.5 | Brown | | |
| Red | 46.4 | 118 | Orange | | |
| Yellow | | | Orange/Black | | |
| Gray | | | Black/ White | | |
| Violet | | | Red/ White | | |

| Overall (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 24.1 cm | 4.3 cm | 2.9 cm | 22.6 cm |
| 9.5" | 1.7" | 1.14" | 8.9" |
| | | | |



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.