


# SLI LIGHTING

122 East Laurel Street  
Mullins, South Carolina 29574  
Ph: 800-922-6693  
www.havells-sli.com


E4-32-I-UV-H @ 120V	
Ordering Code: 61331	
Ballast Type	Electronic
Starting Method	Active Instant Start
Lamp Connection	Parallel
Input Voltage	120-277V
Input Frequency	50/60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
F32T8	4	32	0/-18	1.17	140	1.2	10	.99	1.7	0.86
F32T8	3	32	0/-18	0.93	109	1.28	10	.99	1.7	1.17
F25T8	3	25	0/-18	0.74	87	1.34	10	.99	1.7	1.54
PLL40	3	40	0/-18	0.96	113	1.12	10	.99	1.7	.99

## WIRING DIAGRAM

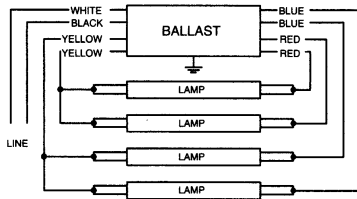

## ENCLOSURE

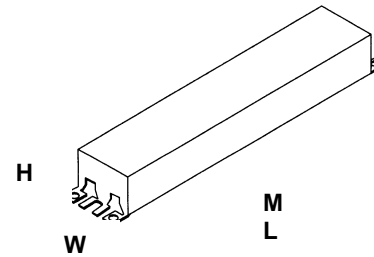

### Standard Lead Length (inch/cm)

	in.	cm.		in.	cm.
Black	18.8	48	Yellow/Blue		
White	18.8	48	Blue/White		
Blue	30.9	78.5	Brown		
Red	30.9	78.5	Orange		
Yellow	46.4	118	Orange/Black		
Gray			Black/ White		
Violet			Red/ White		

Overall (L)	Width (W)	Height (H)	Mounting (M)
24.1 cm	5.9 cm	4 cm	22.6 cm
9.5"	2.33"	1.57"	8.9"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.