


SLI LIGHTING

122 East Laurel Street
Mullins, South Carolina 29574
Ph: 800-922-6693
www.havells-sli.com


E4-32-I-UV-N @ 277V	
Ordering Code: 61323	
Ballast Type	Electronic
Starting Method	Active Instant Start
Lamp Connection	Parallel
Input Voltage	120-277V
Input Frequency	50/60 Hz
Status	Active
Safety Approval	UL/CUL

Lamp Type	No. of Lamps	Rated Lamp Watts	Min Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	Max Lamp Current Crest Factor	BEF
F32T8	4	32	0/-18	0.39	108	0.88	10	0.99	1.7	0.81
F32T8	3	32	0/-18	0.33	91	0.96	15	0.98	1.7	1.05
F30T8	4	30	32/0	0.38	105	0.88	10	0.99	1.7	0.84
F30T8	3	28	32/0	0.3	83	0.96	10	0.99	1.7	1.16
F28T8	4	30	32/0	0.37	102	0.88	10	0.99	1.7	0.86
F28T8	3	28	32/0	0.29	78	0.96	10	0.99	1.7	1.23
F17T8	4	17	0/-18	0.24	62	0.93	35	0.93	1.7	1.50
F17T8	3	17	0/-18	0.21	53	1.01	40	0.92	1.7	1.91
F40T8	3	40	32/0	0.4	110	0.89	15	0.99	1.7	0.81
PLL40	3	40	0/-18	0.34	93	0.82	10	0.98	1.7	0.88

WIRING DIAGRAM



ENCLOSURE

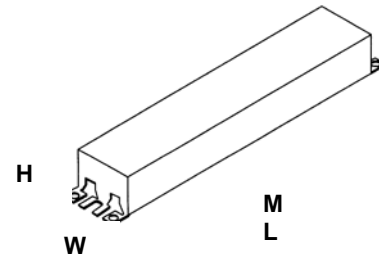

Standard Lead Length (inch/cm)

	in.	cm.		in.	cm.
Black	18.8	48	Yellow/Blue		
White	18.8	48	Blue/White		
Blue	30.9	78.5	Brown		
Red	30.9	78.5	Orange		
Yellow	46.4	118	Orange/Black		
Gray			Black/ White		
Violet			Red/ White		

Overall (L)	Width (W)	Height (H)	Mounting (M)
24.1 cm	4.3 cm	2.9 cm	22.6 cm
9.5"	1.7"	1.14"	8.9"



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.