


# SLI LIGHTING

122 East Laurel Street  
Mullins, South Carolina 29574  
Ph: 800-922-6693  
www.havells-sli.com


| E4-32-I-UV-N @ 277V  |                      |
|----------------------|----------------------|
| Ordering Code: 61323 |                      |
| Ballast Type         | Electronic           |
| Starting Method      | Active Instant Start |
| Lamp Connection      | Parallel             |
| Input Voltage        | 120-277V             |
| Input Frequency      | 50/60 Hz             |
| Status               | Active               |
| Safety Approval      | UL/CUL               |
| Operating Frequency  | 44 kHz               |

| Lamp Type   | No. of Lamps | Rated Lamp Watts | Min Start Temp (°F/C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | Max Lamp Current Crest Factor | BEF  |
|-------------|--------------|------------------|-----------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|------|
| F32T8 (25W) | 4            | 25               | 60/16                 | 0.33                 | 91                       | 0.89           | 10        | 0.98         | 1.6                           | 0.98 |
| F32T8 (25W) | 3            | 25               | 60/16                 | 0.27                 | 73                       | 1.00           | 10        | 0.98         | 1.6                           | 1.37 |
| F32T8       | 4            | 32               | 0/-18                 | 0.39                 | 108                      | 0.88           | 10        | 0.99         | 1.7                           | 0.81 |
| F32T8       | 3            | 32               | 0/-18                 | 0.33                 | 91                       | 0.96           | 15        | 0.98         | 1.7                           | 1.05 |
| F30T8       | 4            | 30               | 32/0                  | 0.38                 | 105                      | 0.88           | 10        | 0.99         | 1.7                           | 0.84 |
| F30T8       | 3            | 28               | 32/0                  | 0.3                  | 83                       | 0.96           | 10        | 0.99         | 1.7                           | 1.16 |
| F28T8       | 4            | 30               | 32/0                  | 0.37                 | 102                      | 0.88           | 10        | 0.99         | 1.7                           | 0.86 |
| F38T8       | 3            | 28               | 32/0                  | 0.29                 | 78                       | 0.96           | 10        | 0.99         | 1.7                           | 1.23 |
| F25T8       | 4            | 25               | 0/-18                 | 0.3                  | 83                       | 0.92           | 15        | 0.98         | 1.7                           | 1.11 |
| F25T8       | 3            | 25               | 0/-18                 | 0.27                 | 71                       | 0.99           | 25        | 0.95         | 1.7                           | 1.39 |
| F17T8       | 4            | 17               | 0/-18                 | 0.24                 | 62                       | 0.93           | 35        | 0.93         | 1.7                           | 1.50 |
| F17T8       | 3            | 17               | 0/-18                 | 0.21                 | 53                       | 1.01           | 40        | 0.92         | 1.7                           | 1.91 |
| F40T8       | 3            | 40               | 32/0                  | 0.4                  | 110                      | 0.89           | 15        | 0.99         | 1.7                           | 0.81 |

## WIRING DIAGRAM



## ENCLOSURE

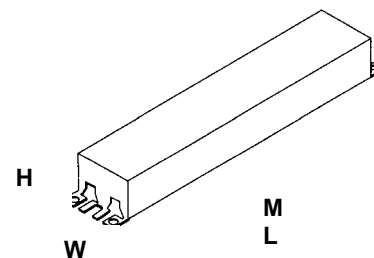

## Standard Lead Length (inch/cm)

|        | in.  | cm.  |              | in. | cm. |
|--------|------|------|--------------|-----|-----|
| Black  | 18.8 | 48   | Yellow/Blue  |     |     |
| White  | 18.8 | 48   | Blue/White   |     |     |
| Blue   | 30.9 | 78.5 | Brown        |     |     |
| Red    | 30.9 | 78.5 | Orange       |     |     |
| Yellow | 46.4 | 118  | Orange/Black |     |     |
| Gray   |      |      | Black/ White |     |     |
| Violet |      |      | Red/ White   |     |     |

| Overall (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 24.1 cm     | 4.3 cm    | 2.9 cm     | 22.6 cm      |
| 9.5"        | 1.7"      | 1.14"      | 8.9"         |



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

# SLI LIGHTING

122 East Laurel Street  
 Mullins, South Carolina 29574  
 Ph: 800-922-6693  
 www.havells-sli.com



## E2-28-P-UV-N @ 120V

Ordering Code: 61332


|                 |             |
|-----------------|-------------|
| Ballast Type    | Electronic  |
| Starting Method | Rapid Start |
| Lamp Connection | Series      |
| Input Voltage   | 120-277V    |
| Input Frequency | 60 Hz       |
| Status          | Active      |
| Safety Approval | UL/CUL      |

| Lamp Type | No. of Lamps | Rated Lamp Watts | Min Start Temp (°F/C) | Input Current (Amps) | Input Power (ANSI Watts) | Ballast Factor | MAX THD % | Power Factor | Max Lamp Current Crest Factor | BEF  |
|-----------|--------------|------------------|-----------------------|----------------------|--------------------------|----------------|-----------|--------------|-------------------------------|------|
| 35W T5    | 2            | 35               | -4/-20                | .69                  | 84                       | 0.9            | 10        | 0.99         | 1.7                           | 1.07 |
| 35W T5    | 1            | 35               | -4/-20                | .35                  | 42                       | 1.02           | 10        | 0.99         | 1.7                           | 2.43 |
| 28W T5    | 2            | 28               | -4/-20                | .56                  | 68                       | .93            | 10        | 0.99         | 1.7                           | 1.37 |
| 28W T5    | 1            | 28               | -4/-20                | .29                  | 35                       | 1.07           | 10        | 0.99         | 1.7                           | 3.06 |

### WIRING DIAGRAM

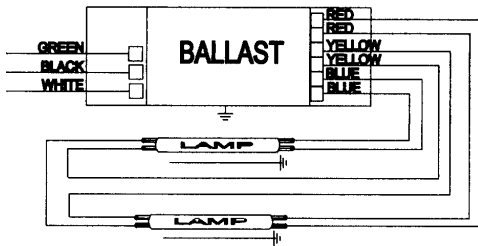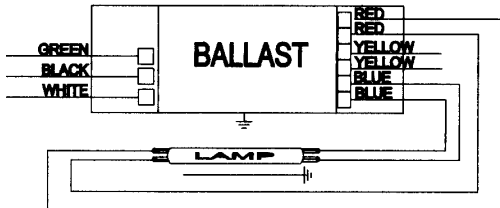

### ENCLOSURE

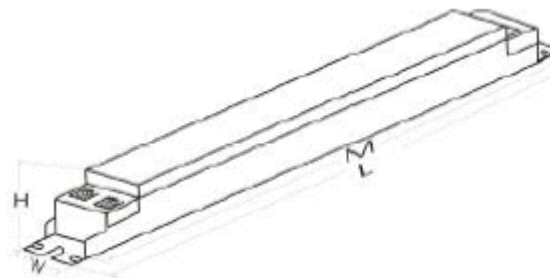

| Overall (L) | Width (W) | Height (H) | Mounting (M) |
|-------------|-----------|------------|--------------|
| 32.5 cm     | 6.4 cm    | 3 cm       | 31.7 cm      |
| 12.8"       | 2.52"     | 1.18"      | 12.5"        |



Data is based upon tests performed by SLI Lighting in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.