

24CENIT-654U-EB5-24CK


### INTENDED USE

- High Efficiency Fluorescent High Bay Fixture used to replace HID Luminaries and high ceiling applications.
- For use in retail, warehouses, commercial, industrial and manufacturing areas.

### FEATURES

- Very low profile – only 2.4 inches deep.
- Anticorrosive treated steel housing.
- Electrostatic powder coating after fabrication.
- Precision formed highly polished reflector segmented for each application.
- Lightweight – easy to handle and mount.
- Prewired for multi level switching.
- Can be suspended or surface mounted.
- UL listed with Class P rated ballast.
- Reflector 90% reflectivity.

### ORDERING INFORMATION

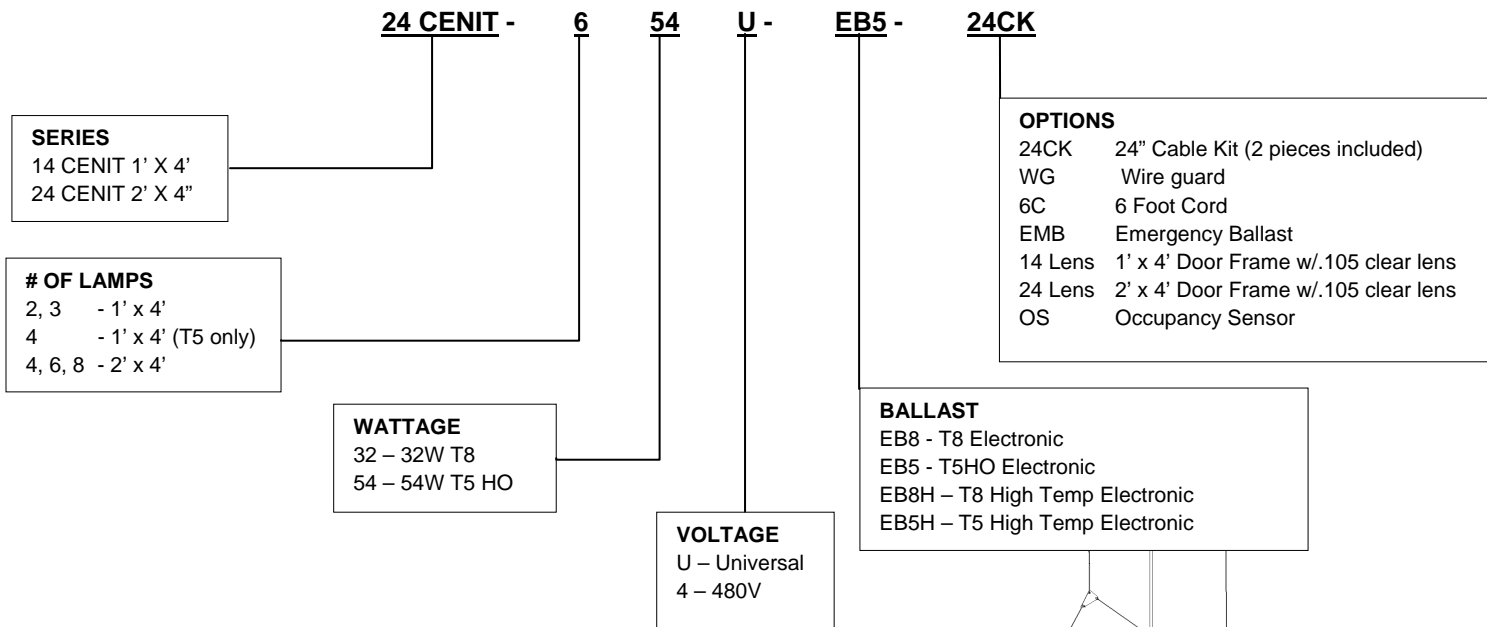

Unit Dimensions in inches	A	B	C
14 CENIT (1' x 4') T5	2.4	14	46.3
14 CENIT (1' x 4') T8	2.4	14	48.4
24 CENIT (2' x 4') T5	2.4	25.1	46.3
24 CENIT (2' x 4') T8	2.4	25.1	48.4
24 CENIT (2' x 4') T5 (8 lamp only)	2.4	32.7	46.3
24 CENIT (2' x 4') T8 (8 lamp only)	2.4	32.7	48.4

