

Watts	Bulb	Base	Order Code	Description	Beam Spread	Volts	Pkg. Qty.	Apprx. Hours	Filament	Length (in.)	Apprx. Lumen	CBCP (1)
-------	------	------	------------	-------------	-------------	-------	-----------	--------------	----------	--------------	--------------	----------

### Single Ended T4

75	T4	Mini Can	<b>60262</b>	75Q/CL Mini-Can		130	10	2000	CC-8	2 9/16	1400	
100	T4	Mini Can	<b>60263</b>	100Q/CL Mini-Can		130	10	2000	CC-8	3	1900	
150	T4	Mini Can	<b>60265</b>	150Q/CL Mini-Can		130	10	2000	CC-8	2 5/8	2700	
		DC Bay	<b>60267</b>	150Q/CL DC Bay		130	10	2000	CC-8	2 9/16	2700	
250	T4	Mini Can	<b>60269</b>	250Q/CL Mini-Can		130	10	2000	CC-8	3 1/8	4800	
		DC Bay	<b>60271</b>	250Q/CL DC Bay		130	10	2000	CC-8	2 13/16	4800	
500	T4	Mini Can	<b>60273</b>	500Q/CL Mini-Can		130	10	2000	CC-8	3 5/8	7850	

### Double Ended T3

100	T3	RSC	<b>14904</b>	100T3Q/CL		120	50	2000	C-8	3 1/8	1600	
150	T3	RSC	<b>61000</b>	150T3Q/S/CL (1/CD)		130	12 cds	2000	C-8	3 1/8	2400	
300	T3	RSC	<b>60272</b>	300T3Q/CL		130	12	2000	C-8	4 11/16	6000	
			<b>60995</b>	300T3Q/CL (1/CD)		130	12 cds	2000	C-8	4 11/16	6000	
500	T3	RSC	<b>60275</b>	500T3Q/CL		130	12	2000	C-8	4 11/16	10500	
			<b>60996</b>	500T3Q/CL (1/CD)		130	12 cds	2000	C-8	4 11/16	10500	
1500	T3	RSC	<b>60276</b>	1500T3Q/CL-240		240	12	2000	C-8	10 1/16	33000	
			<b>60277</b>	1500T3Q/CL-277		277	12	2000	C-8	10 1/16	33000	


### PAR20 Halogen

50	PAR20	Med	<b>14203</b>	H50PAR20/SP/10	10°	120	15	2500	CC-8	3 3/8	550	5000
			<b>14204</b>	H50PAR20/FL/30	30°	120	15	2500	CC-8	3 3/8	550	1250
			<b>14253</b>	H50PAR20/SP/10	10°	130	15	2500	CC-8	3 3/8	550	5000
			<b>14254</b>	H50PAR20/FL/30	30°	130	15	2500	CC-8	3 3/8	550	1250

### PAR30 Halogen

50	PAR30	Med	<b>14500</b>	H50PAR30/SP/10	10°	120	15	2500	CC-8	3 5/8	600	8000
			<b>14501</b>	H50PAR30/FL/30	30°	120	15	2500	CC-8	3 5/8	600	1300
			<b>54551</b>	H50PAR30/FL/TC/30	30°	120	15	2500	CC-8	3 5/8	600	1300
			<b>14502</b>	H50PAR30/WFL/40	40°	120	15	2500	CC-8	3 5/8	600	500
			<b>14550</b>	H50PAR30/SP/10	10°	130	15	2500	CC-8	3 5/8	600	8000
			<b>14551</b>	H50PAR30/FL/30	30°	130	15	2500	CC-8	3 5/8	600	1300
			<b>14552</b>	H50PAR30/WFL/40	40°	130	15	2500	CC-8	3 5/8	600	500
			75	PAR30	Med	<b>14503</b>	H75PAR30/SP/10	10°	120	15	2500	CC-8
<b>14504</b>	H75PAR30/FL/30	30°				120	15	2500	CC-8	3 5/8	1100	3000
<b>54554</b>	H75PAR30/FL/TC/30	30°				120	15	2500	CC-8	3 5/8	1100	3000
<b>14505</b>	H75PAR30/WFL/40	40°				120	15	2500	CC-8	3 5/8	1100	2000
<b>14553</b>	H75PAR30/SP/10	10°				130	15	2500	CC-8	3 5/8	1100	14000
<b>14554</b>	H75PAR30/FL/30	30°				130	15	2500	CC-8	3 5/8	1100	3000
<b>14555</b>	H75PAR30/WFL/40	40°				130	15	2500	CC-8	3 5/8	1100	2000

(1) Center Beam Candle Power

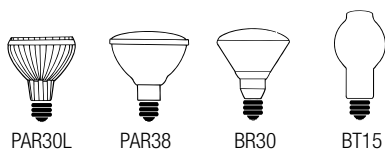

Watts	Bulb	Base	Order Code	Description	Beam Spread	Volts	Pkg. Qty.	Apprx. Hours	Filament	Length (in.)	Apprx. Lumen	CBCP (1)
-------	------	------	------------	-------------	-------------	-------	-----------	--------------	----------	--------------	--------------	----------

**PAR30 Halogen Long Neck**

50	PAR30L	Med	<b>30257</b>	H50PAR30/LN/SP/12	12°	130	15	2500	CC-8	4 1/2	600	1300
			<b>30256</b>	H50PAR30/LN/NFL/30	30°	130	15	2500	CC-8	4 1/2	600	8000
			<b>30258</b>	H50PAR30/LN/WFL/50	50°	120	15	2500	CC-8	4 1/2	600	500
			<b>30265</b>	H50PAR30/LN/WFL/50	50°	130	15	2500	CC-8	4 1/2	600	500
75	PAR30L	Med	<b>30262</b>	H75PAR30/LN/SP/12	12°	130	15	2500	CC-8	4 1/2	1100	3000
			<b>30261</b>	H75PAR30/LN/NFL/30	30°	130	15	2500	CC-8	4 1/2	1100	14000
			<b>30259</b>	H75PAR30/LN/WFL/50	50°	120	15	2500	CC-8	4 1/2	1100	2000
			<b>30260</b>	H75PAR30/LN/WFL/50	50°	130	15	2500	CC-8	4 1/2	1100	2000

**PAR38 Halogen**

45	PAR38	Med	<b>14700</b>	H45PAR38/SP/10	10°	120	15	2500	CC-8	5 5/16	530	5800
			<b>14701</b>	H45PAR38/FL/30	30°	120	15	2500	CC-8	5 5/16	530	2000
			<b>14750</b>	H45PAR38/SP/10	10°	130	15	2500	CC-8	5 5/16	530	5800
			<b>14751</b>	H45PAR38/FL/30	30°	130	15	2500	CC-8	5 5/16	530	2000
			<b>14758</b>	H45PAR38/WFL/50	50°	130	15	2500	CC-8	5 5/16	530	2000
60	PAR38	Med	<b>14706</b>	H60PAR38/SP/10	10°	120	15	2500	CC-8	5 5/16	900	8400
			<b>14707</b>	H60PAR38/FL/30	30°	120	15	2500	CC-8	5 5/16	900	3000
			<b>14756</b>	H60PAR38/SP/10	10°	130	15	2500	CC-8	5 5/16	900	8400
			<b>14757</b>	H60PAR38/FL/30	30°	130	15	2500	CC-8	5 5/16	900	3000
75	PAR38	Med	<b>14702</b>	H75PAR38/SP/10	10°	120	15	2500	CC-8	5 5/16	1100	11500
			<b>14703</b>	H75PAR38/FL/30	30°	120	15	2500	CC-8	5 5/16	1100	3900
			<b>14752</b>	H75PAR38/SP/10	10°	130	15	2500	CC-8	5 5/16	1100	11500
			<b>14753</b>	H75PAR38/FL/30	30°	130	15	2500	CC-8	5 5/16	1100	3900
90	PAR38	Med	<b>14704</b>	H90PAR38/SP/10	10°	120	15	2500	CC-8	5 5/16	1300	14500
			<b>14705</b>	H90PAR38/FL/30	30°	120	15	2500	CC-8	5 5/16	1300	4500
			<b>14754</b>	H90PAR38/SP/10	10°	130	15	2500	CC-8	5 5/16	1300	14500
			<b>14755</b>	H90PAR38/FL/30	30°	130	15	2500	CC-8	5 5/16	1300	4500
120	PAR38	Med	<b>30280</b>	H120PAR38/FL/30	30°	130	15	2500	CC-8	5 5/16	1800	4600
			<b>30281</b>	H120PAR38/FL/10	10°	130	15	2500	CC-8	5 5/16	1800	22500

**Crystal-Lux Indoor Halogen BR30**

60	BR30	Med	<b>1568</b>	H60BR30/FL	80°	Crystal-Lux		120	24	2500	C-8	5	730
75	BR30	Med	<b>1569</b>	H75BR30/FL	80°	Crystal-Lux		120	24	2500	C-8	5	900

**Crystal-Lux Indoor Halogen BT15**

60	BT15	Med	<b>30270</b>	BC-H60BT15/CL	1/CD	Crystal-Lux		120	24 cds	2500	CC-8	4	930
			<b>30271</b>	BC-H60BT15/WH	1/CD	Crystal-Lux		120	24 cds	2500	CC-8	4	840
75	BT15	Med	<b>30272</b>	BC-H75BT15/WH	1/CD	Crystal-Lux		120	24 cds	2500	CC-8	4	980
100	BT15	Med	<b>30273</b>	BC-H100BT15/WH	1/CD	Crystal-Lux		120	24 cds	2500	CC-8	4	1620

(1) Center Beam Candle Power