

Listed


### INTENDED USE

- Ideal for contemporary design applications where precise illumination is needed. Provides a minimum of 90 minutes of illumination with MR-16 lamps when loss of power occurs.

### FEATURES

- Utilizes MR-16 halogen lamps
- UL listed for damp location
- Completely self-contained
- Fully automatic operation
- Compact, low-profile design in neutral finish
- Universal mounting plate with easy Quick Connect for rapid, labor-saving installation
- Push -to-test switch
- 6-volt, sealed lead acid, maintenance-free battery
- Environmentally-coated, solid state charger
- Automatic, low-voltage disconnect
- Universal transformer for 120 to 277 VAC
- Injection-molded, V-O flame retardant, high-impact thermoplastic housing
- Charge rate/power on LED indicator light

### DIMENSIONS:

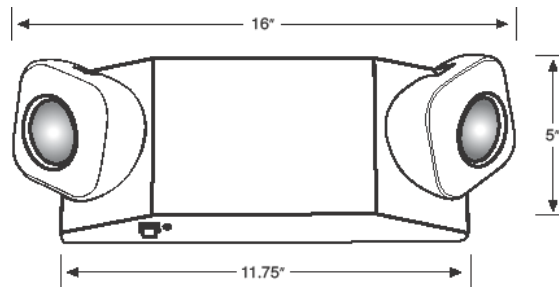

Catalog Model #	Emergency Operation	Voltage Input	Lamp Wattage	Battery Type	Battery Voltage	Remote Capable	Warranty
R-16	90 min.	120V/277V	2x5W MR16	Sealed Lead Acid	6V	No	5 years