




INTENDED USE

- Field installed for fluorescent fixtures with emergency power to illuminate accompanying lamps. Ballasts will provide a minimum of 90 minutes of power at specified lumens upon power interruption.

FEATURES


- Long life, high temperature Ni-CAD Battery
- 90 minutes plus operation
- UL listed
- 5 year Warranty
- 120/277 volts dual voltage input
- LED indicator light
- Single Pole Test Switch
- Meets all NEC and NFPA codes

ORDERING INFORMATION

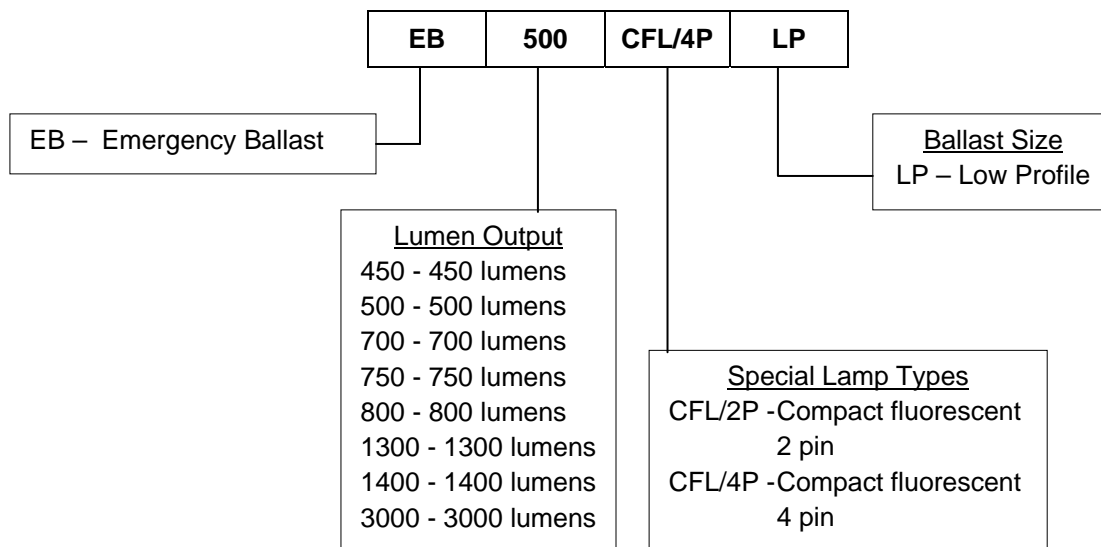

Unit Dimensions in inches

	A	B	C
EB 450	9.4	1.5	2.4
EB 500	9.4	1.1	2.4
EB 500 LP	14.2	1.2	1.1
EB 700	9.4	1.5	2.4
EB 750 CFL/2P	9.4	1.5	2.4
EB 750 CFL/4P	9.4	1.5	2.4
EB 800 LP	17.5	1.2	1.1
EB 1300 LP	21.5	1.2	1.1
EB 1400	13.3	1.5	2.4
EB 3000	16.3	1.75	5.5

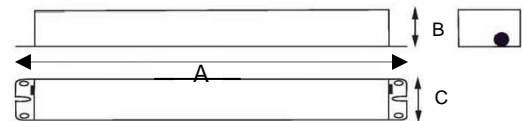

Ballast Dimension