



EXEM-LED-RC



EXEM-LED-GW



LISTED



INTENDED USE

- Ideal For applications where a slimline low profile combination exit fixture and emergency lighting fixture unit are needed. The exit unit is LED lighted providing excellent energy savings.

FEATURES

- Universal mounting canopy for top installation
- Energy consumption of less than 4 watts for red letters and less than 5 watts for green letters
- LED lamp life of 25 years
- Push-to-test switch
- 6-volt, sealed lead acid, maintenance-free battery
- Automatic, low-voltage disconnect
- Universal transformer for 120 or 277 VAC operation
- Two 5.4W fully adjustable, glare-free lighting heads
- Injection-molded, V-O flame retardant, high impact thermoplastic housing
- Suitable for damp location
- 5 year warranty

ORDERING INFORMATION

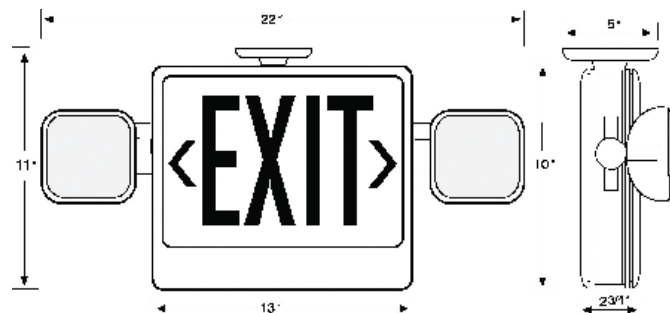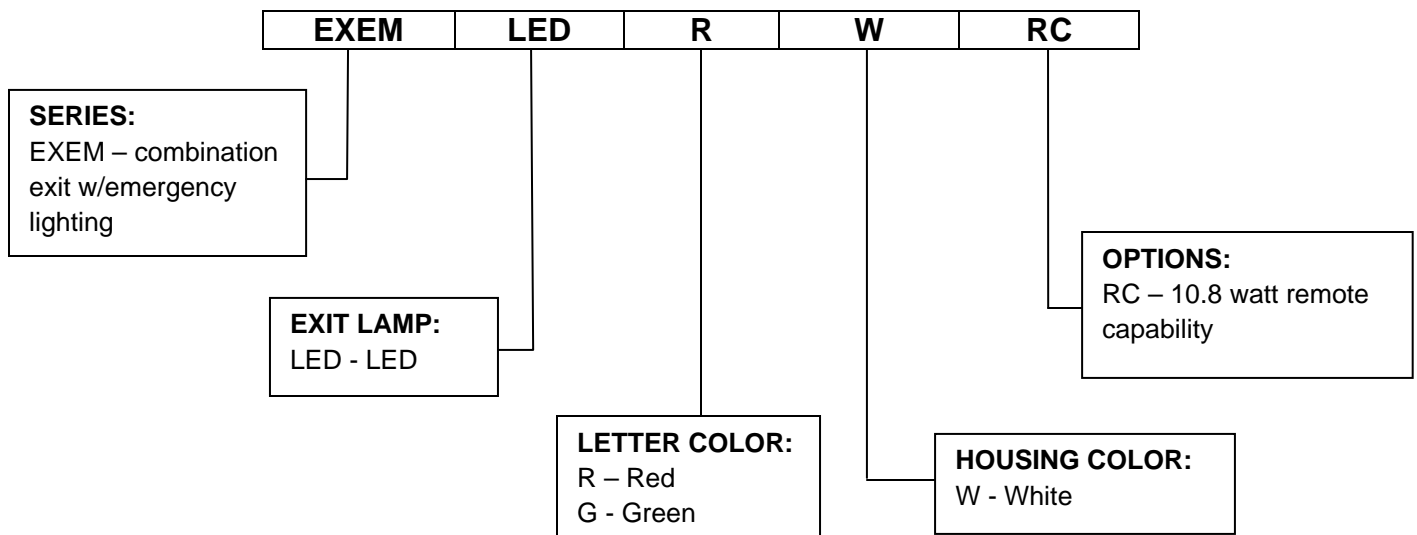

EXEM-LED-RW-RC