


DIMENSIONS - (INCHES)

Nominal dimensions : 12 x 1

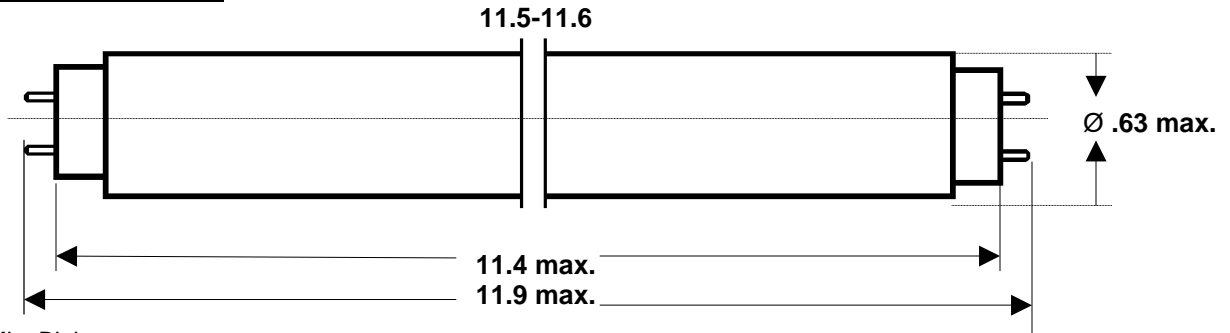

Base: Min. Bipin

ELECTRICAL DATA

	<u>NOMINAL VALUE</u>	<u>MIN.</u>	<u>MAX.</u>
Lamp nominal wattage (W):			
Lamp rated wattage (W):	7.1	6.2	8.0
Lamp operating voltage (V):	56.0	48.0	64.0
Lamp current (mA):	145		
Preheat current (mA) :	220	160	250

OPERATING CONDITIONS

Cap rim temperature	(EC):		80
Lamp ambient temperature	(EC):	25	-15
Burning Position		any	
Average Life	(h)	10,000	

PHOTOMETRIC DATA:

<u>Lamp Description</u>	<u>Kelvin Color (K)</u>	<u>CRI</u>	<u>Rated Life</u>	<u>Initial Lumens (LM)</u>
F8T5/CW	4100	62	10,000	380
F8T5/BL350	Not for general lighting purposes			

Issued by: SLI Lighting
Date: June 6, 2003

DATA SHEET

Page 1 of 1