



## Dimensions




Bulb Shape	(A) MOL	(B) LCL	(C) Bulb Diameter
BT37	11.5"	7.0"	4.6"
BT56	15.4"	9.5"	7.0"

## Technical Information

Typical Lumen Maintenance

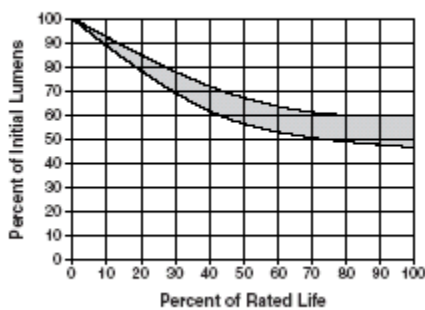

Typical Survival Curve

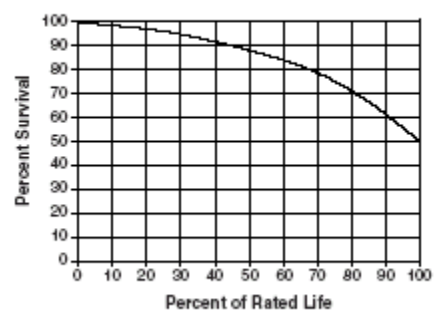

## Ordering Information

Order Code	Lamp Description	Watts	Bulb	Kelvin Color	CRI	Initial Lumens	Mean Lumens	Average Rated Life (hours)
29100	MH400/P/BU	400	BT37	3600K	65	40,000	26,000	20,000
29101	MH1000/P/BU	1000	BT56	3600K	65	109,000	87,500	15,000

Date Issued: July 2006  
Replaces: NEW

## DATA SHEET

Page 1 of 1

SLI reserves the right to change data and specifications without notice.  
Data for guidance only.

**SLI LIGHTING**

1-800-922-6693  
www.sli-lighting-usa.com